

Fly Beyond
To work from 50-100Km
Range max. 200Km

Radio Control
Data Link
Mavlink Telemetry
PC Windows 10
Maps, navigation



Video
Monitor IPS LED 10" FULL HD
Analog Receiver 5.8Ghz
Digital Input HDMI

Vehicles

DRONES, UAV, MULTIROTORS, RPAS, VANT, UAV,
AIRCRAFT, HELICOPTERS, UUV, UGV, ROV, USV, ASV,
CARS, BOATS, ROBOTS...

Embedded PC



Features

- Windows 10.
- Processor: Intel Quad Core of 1.8GHz.
- 4GB RAM and 64GB flash.
- 1 Touch screen 7".
- 1 Keyboard.
- 1 USB 3.0.
- 1 USB 2.0.
- 1 Wifi.
- 1 Bluetooth.

Software included:

- DMDStudio, XLR5 devices configurator.
- Mission Planner, Ground control station for Plane, Copter and Rover.
- Aerosim, FPV simulator (Demo).
- *You can add Others softwares.*

Mini Keyboard behind the screen



Tilt Control of the PC Screen from Button



FPV Video Screen**Size 10,1"****High Brightness****Visible with
sunlight****RX 5.8Ghz****HDMI Input for
digital video RX****OSD Shows instrumental with Mavlink and XLRSD4 Telemetry****Features****Receiver 5.8Ghz integrated.****Resolution: 1920 x 1080.****Aspect ratio: 16: 10****Brightness: 600cd / m2****Contrast: 1000: 1.****Controlled temperature.****Speakers.****1 Audio/Video input with jack connector.****1 RCBUS Connector to update and configure
5.8Ghz receiver.****1 HDMI input to directly connect a digital video
or PC of GCSD4V2.****IPS LED video screen 10.1" Full HD,
high brightness, high contrast and
anti-glare, makes it an excellent
screen to see on indoors and outdoors.**



Total Control

Features

- RC Control independent of the PC.
- 3 Processors: RC Control and Joysticks.
- 2 Joysticks RC: professional and sensitive.
- 1 LCD screen easy-to-read, high contrast.
- 2 OLED screen Black/White for viewing data.
- 12 Configurable buttons.
- 3 Encoders with push button.
- 2 Micro Joysticks for trims and functions.
- 2 Potentionmeters.
- 2 Pushbuttons.
- 4 Switches with 2 positions
- 2 Switches with 3 positions
- 1 Buzzer: Alarms, low battery, fail safe, etc.
- 1 RCBUS: Connection to Video RX XLRs, second XLRs TX and future XLRs devices.
- 1 Connector antenna: SMA Female.




Start-up Key.

Digital Voltmeter.

Fuse 5A.

12V connector for Video Screen.

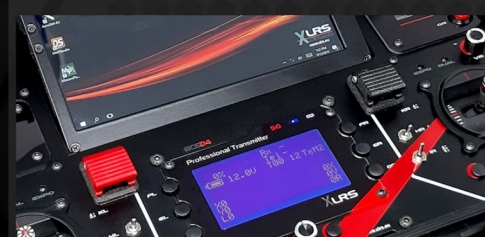

2 Safety Switch with protective cover for some specific safety functions.

Battery


Features

Lipo 3S/11.1V/5Ah.

Duration approx: 2'5-3h.

Charger 1A.

Input 12-24V.

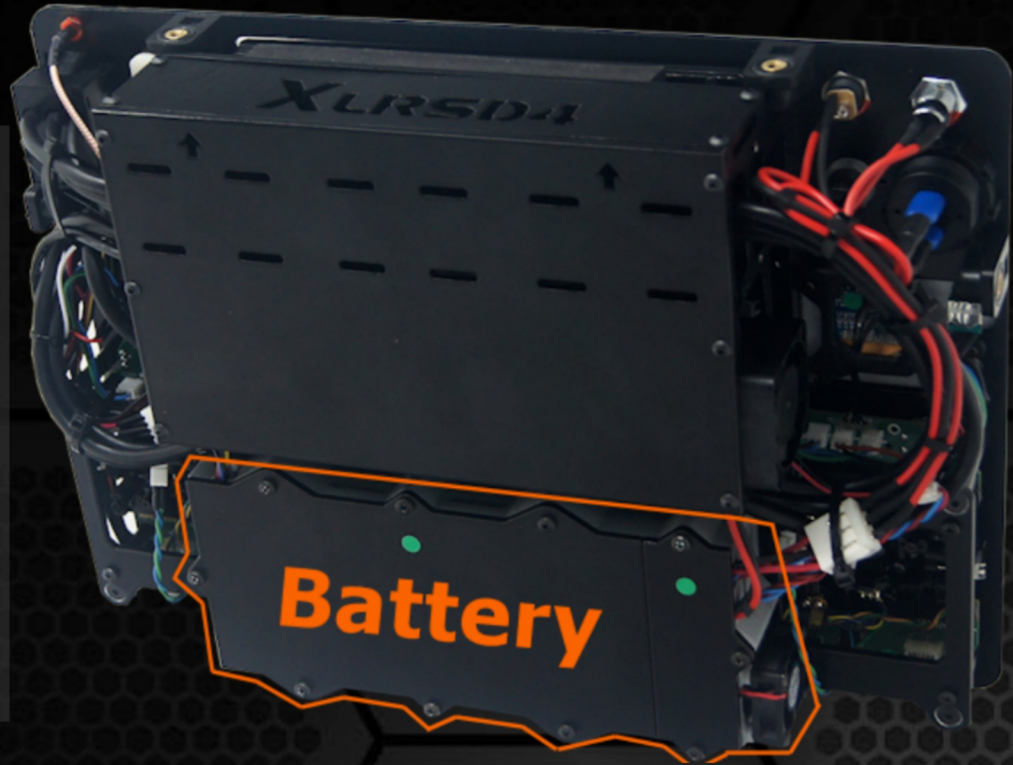

Shows battery status from digital voltmeter or central screen



Charger included 110 / 220V AC 50Hz



It has a 5A fuse to protect the GCS

Suitcase

Robust

Dustproof

Water resistant

IP67 certified



Features

*Temperature controlled with fans.
Certified with STANAG 4280, DEF STAN 81-41
and ATA 300 standards.
Automatic air pressure compensation valve.
Temperature resistant from -30 ° to + 80 ° C.*

*Rubber handle for easy transport.
2 eyelets for padlocks (Ø 7.62 millimeters).
Optional accessories: transport belt.
Dimensions: 36.5 x 29.4 x 17 centimeters.
Total Weight: 9Kg.*

Software - Mission Planner



Plan, save and load autonomous missions into your autopilot with simple point-and-click way-point entry on Google or other maps.

Compatible with autopilots that use Mavlink Protocol: Pixhawk, APM, Pixhawk Cube, Pix32 and more.

Features

Connect the autopilot telemetry to the XLRs systems.

Setup, configure, and tune your vehicle for optimum performance.

Download and analyze mission logs created by your autopilot.

Monitor your vehicle's status while in operation.

Record telemetry logs which contain much more information than the on-board autopilot logs.

View and analyze the telemetry logs.



Software - DMDStudio

Compact, you can use multiple instances.

Multiple simultaneous DMD devices.

Auto adaptable to DMD devices.

DMD Alpha command language.

Graphics and text console.

Free for DMD systems users.



Configuration software and utilities for all DMD products manufactured since 2014.



Features

For Windows 7 or higher.

Device firmware update (BOOT).

Connectivity Prepared for IOT devices. (Internet of things).

Multiple communications ports: COM, USB, UDP, TCP.

Several TCP and UDP servers depending on the device.

Connection to the DMD Cellular software.

Configuration of the specific characteristics of each device.

Professional Ground Control Station FPV & UAV**CE 869Mhz****FCC 902Mhz****Custom...****INTEGRATED XLRS RADIO**

Manufactured with the latest technology of radio system 5th generation of DMD, that provides great radio link security for long distances.

Integrated XLRs radio with SMA-Female output for coaxial cable antenna 1 to 3m maximum length.

**TECHNICAL SPECIFICATIONS XLRs RADIO**

Range of Work	50-100Km.
Maximum Range	200Km.
Frequency	CE: 869,4-869,65Mhz. FCC: 902-927,5Mhz. CUSTOM: 433Mhz, others...
Multi Band	866, 868, 902, 915, 950Mhz or 433Mhz.
Max RF power	CE: +27dBm. FCC: +30dBm. CUSTOM: +30dBm.
Sensitivity max	-116dBm @50kb.
Modulation	50 or 100Kb. FHSS. 2-GFSK.
Stability	TXCO +-1ppm.
Antenna Connector	SMA-Female.
Encryption	AES 128 bits.
Connectivity	RC, TELEMETRY, USB, BLUETOOTH, WIFI, RCBUS.
Upgradable & Configurable	DMDStudio Soft.
Compatible	ALPHA Commands and DMD devices.

TECHNICAL SPECIFICATIONS VIDEO RECEIVER

Frequency	5.8Ghz.
Channels	8. 5705Mhz, 5685Mhz, 5665Mhz, 5645Mhz, 5885Mhz, 5905Mhz, 5925Mhz, 5945Mhz
Sensitivity	-85dBm.
Antenna	Internal.
GCSD4V2	Ready for analog and digital video Systems.

Professional Receiver Ultra Long Range RC & Telemetry

CE 869Mhz
FCC 902Mhz
Custom...



**Radio Control &
Telemetry**

**Powerful and Safe
with control**

New Concept

Configuration of the mixes, button activation and assignment of encoders are performed in the RX and not in the TX XLRs as is usual in amateur RC systems.

TECHNICAL SPECIFICATIONS

Range of Work	50-100Km
Maximum Range	200Km
Frequency	CE: 869,4-869,65Mhz. FCC: 902-927,5Mhz. CUSTOM: 433Mhz, others...
Multi Band	866, 868, 902, 915, 950Mhz or 433Mhz.
Max RF power	CE: +27dBm. FCC +30dBm. CUSTOM: +30dBm.
Sensitivity max	-116dBm @50kb.
Modulation	50 or 100Kb. FHSS. 2-GFSK.
Stability	TXCO +-1ppm.
Encryption	AES 128 bits.
Voltage	5V. Min 4.5V. Max 6Vcc.
Consumption	Standby 70mA. Max. TX(500mW) 540mA@12mS.
Connectivity:	RC, Telemetry, USB, RCBUS, SPPM, COM5, MODEM.
Dimension:	70,78 x 35,75 x 14,78mm.
Weight:	30g (Without ant.) 47g (With ant. 5dBi).
Box:	Plastic and fiber base 2mm.

FEATURES

- Control max up to 16 CH RC.** Using the 7CH physical and the autopilot CH through SPPM in CH7.
- 8 Multifunction outputs** for RC servos.
- 1 SPPM / CPPM:** 12 RC channels in CH7.
- 1 Micro USB:** Update and configuration.
- 1 i2C:** To connect future devices, Oled display, sensors.
- 1 RCBUS:** Connect XOSD for serial communication.
- 1 MODEM port:** MAVLINK Telemetry and transparent radio modem.
- 1 Red Led:** TX RF or Transmit packets.
- 1 Blue Led:** Link RF or Received packets.
- 1 Connector antenna RC:** SMA-Female.

Compatible with XLRs devices:

TX: BTSD1, XPAD2-2017, XPAD2 V2, XPAD3, GCSD4, GCSD4V2...
OSD: XOSD, XOSDV2, XOSD3...

Hardware improvements:

Microcontroller with double memory FLASH, RAM and Eeprom.
 Improved PCB, more protection in general.
 Improved box, more robust, screws on inserts.
 Internal protection against reverse polarity on + 5V servo connectors.
 EDS protection and RF Filters in USB.
 ESD protection (static) for all pins including servos.
 Pins servos protection against short circuits and overloads.

MAVLINK protocol, compatible with autopilots:

APM, Pixhawk, PX4, etc.
No additional radiomodem is required.

Compatible with autopilots with S-BUS?

Yes, depending on the autopilot you can connect directly to CH7 (SPPM) or you can use a PPM to S-BUS converter.

**Some product features
are optional.*

XLRs
EXTENDED

www.xlrs.eu

Manufactured by DMD. Digital Micro Devices. ©2019



CONTENT

- 1- GCSD4V2, Portable Ground Control Station.
- 1- RXLRS, Professional receiver RC and Telemetry.
- 1- BQ89, Biquad antenna 866-920Mhz 11-12dBi or 1- MX43, Moxon Rectangel Antenna 400-480Mhz 5.5dBi.
- 2- ANTGSM900, Omnidirectional antenna 868-928Mhz 5dBi or 2-ANTGSM43. Omnidirectional antenna 433Mhz 5dBi.

ACCESSORIES

- 1- Mini bluetooth keyboard.
- 1- LI-PO Battery Balance Charger, 40W 3S/4S.
- 1- LAT54_SMAH/SMAM. Cable SMA-Female to SMA-Male, 540mm.
- 1- CABLE_SERVO_HH. Cable Servo RC Female to Female.
- 1- CABLE_EXT_SERVO_MH. Extensor Cable Servo RC Male to Female.
- 1- CABLE_PX4_RX. Adapted Cable for Pixhawk-RX.
- 1- CABLE_MJJ. Cable Audio Stereo MiniJack 3.5M/M 1m.
- 1- CABLE_USB/MICROUSB. Cable USB-A Male to Micro USB-B Male, 2m.
- 1- LAT3_SMAH/SMAM. Pigtail Cable SMA-Female to SMA-Male, low loss, 3m.



GCSD4V2 Manual:

Manual GCSD4V2.

Manual RXLRS.

Default configuration D4 System.

First steps (Quick guide).

XLRS connection diagrams.

DMDStudio Manual:



Learn more about:

Servos XLRS.

XLRS objects.

XLRS Radio Links and Radio Control. Basics notions.

Range, RSSI, Noise in environments UAV – Drones.

Range Test XLRS.

RF Band ISM-ICM.

**Some product features are optional.*